



EPSOLAR innovation keeps you

# One Step Ahead



## EPIP

### SOLAR CONTROLLER

#### FOR SOLAR POWER SYSTEM WITH DIGITAL AND SYMBOL DISPLAY

EPSOLAR EPIP is the second generation with high quality and reliability.

- Adds new features and protections using highly advance technology
- Provides longer battery life and improved system performance
- Sets new standards for reliability and self-diagnostics

#### STANDARD FEATURES:

Versions available: 20, 30 or 40 amp


12/24 volt auto-work negative or positive ground

- Microprocessor which is made in USA
- PWM or ON/OFF series battery charging options
- State of charge (SOC) battery regulation
- Battery Ah setting, boost charging, equalising charging, float charging
- Automatic load reconnection, manual load switch
- Automatic selection of voltage (12 V / 24 V)
- Temperature compensation
- LCD display: SOC as a fuel gauge, all system parameters in digital value, system status as symbols
- Full circuit protection, electronic fuse • Field adjustable parameters by four buttons
- **Load control option: ON/OFF, Dusk-to-Dawn, On + setting hours, setting time ON/OFF. (For type -II)**
- **Real clock display (For type -II)**

#### ELECTRONIC PROTECTIONS:


- Short circuit-solar and load
- Overload-solar and load
- Reverse polarity, reverse current at night
- High voltage disconnect
- Loads protected from voltage spikes
- Automatic recovery with all protections

#### EPIP SOLAR CONTROLLER(LCD DISPLAY)

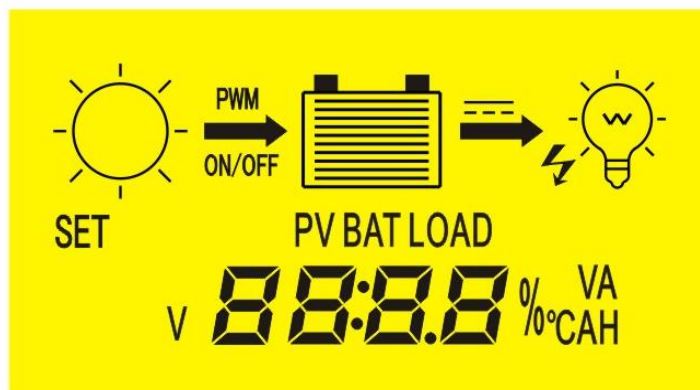


## OPTIMIZED BATTERY CHARGEING:

The EPIP controller has 4 stages of charging to provide increased battery capacity and life.

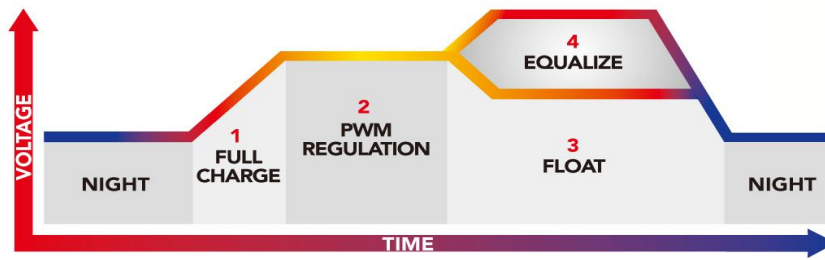

## MECHANICAL SPECIFICATIONS:

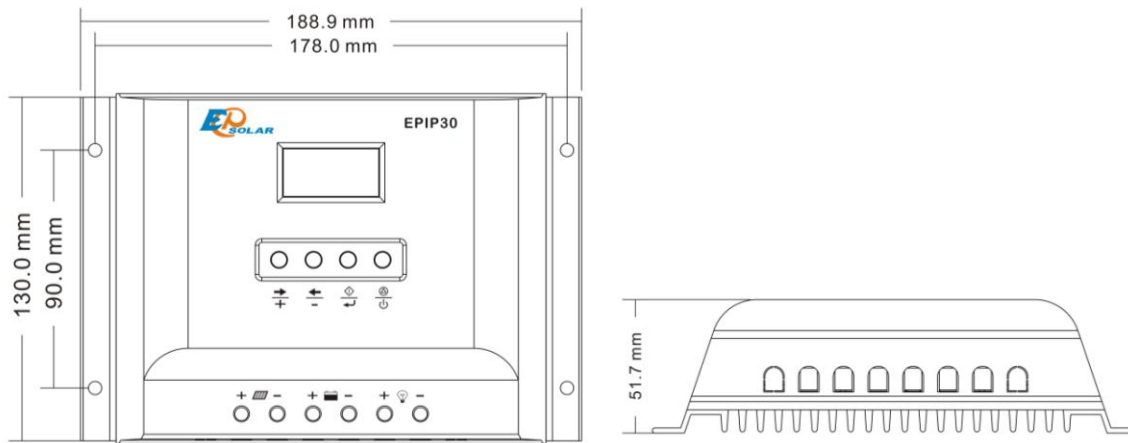

## TECHNICAL INFORMATION:

	20 Amp	30Amp	40Amp
Rated solar input	20A	30A	40A
Rated load	20A	30A	40A
System voltage	12/24V	12/24V	12/24V
Regulation Voltage	14.4V	14.4V,	14.4V
Float	13.4V	13.4V	13.4V
Equalization	14.8V	14.8V	14.8V
Load Disconnect	11.1V	11.1V	11.1V
Load Reconnect	12.6V	12.6V	12.6V
Temp.Comp.(mV/°C)	-30mV	-30mV	-30mV
Self-consumption	≤30mA	≤30mA	≤30mA
Operation temperature:	-35 to +55		
Compliance:	CE world Bank		
Note:	values are for 12V. Use 2X for 24V.		

**WARRANTY: Three years warranty period. Contact EPSOLAR or your authorized distributor for complete terms**



## BEIJINGEPSOLAR TECHNOLOGYCO.,LTD.

Address:RM.501, BLDG 2, International Technology Park, No. 1 Shangdi

Xinxi Road, Haidian district, BEIJING,CHINA.100085

TEL:86-10-82894896/4856 FAX:86-10-82894882

Email:polly\_sun2003@163.com Website:www.epsolarpv.com

Msn:polly\_sun2003@hotmail.com