



EPSOLAR innovation keeps you

One Step Ahead

EPIP602

SOLAR CONTROLLER

FOR SOLAR POWER STATION WITH DIGITAL AND SYMBOL DISPLAY

EPSOLAR EPIP-II is the second generation with high quality and reliability.

- With professional program, use SCM.
- Adds new features and protections using highly advance technology.
- Provides longer battery life and improved system performance
- Sets new standards for reliability and self-diagnostics

STANDARD FEATURES:

Versions available: 40, 50 or 60 amp


12/24/48 volt auto-work negative or positive ground

- Microprocessor which is made in USA
- PWM or ON/OFF series battery charging options
- State of charge (SOC) battery regulation
- Battery Ah setting, boost charging, equalising charging, float charging
- Automatic load reconnection, manual load switch
- Automatic selection of voltage (12 V / 24 /48V)
- Temperature compensation
- LCD display: SOC as a fuel gauge, all system parameters in digital value, system status as symbols
- Full circuit protection, electronic fuse • Field adjustable parameters by four buttons
- **Load control option: ON/OFF, Dusk-to-Dawn, On + setting hours, setting time ON/OFF. (For type -II)**
- **Real clock display (For type -II)**


ELECTRONIC PROTECTIONS:

- Short circuit-solar and load
- Overload-solar and load
- Reverse polarity, reverse current at night
- High voltage disconnect
- Loads protected from voltage spikes
- Automatic recovery with all protections

SYSTEM ASSEMBLYING

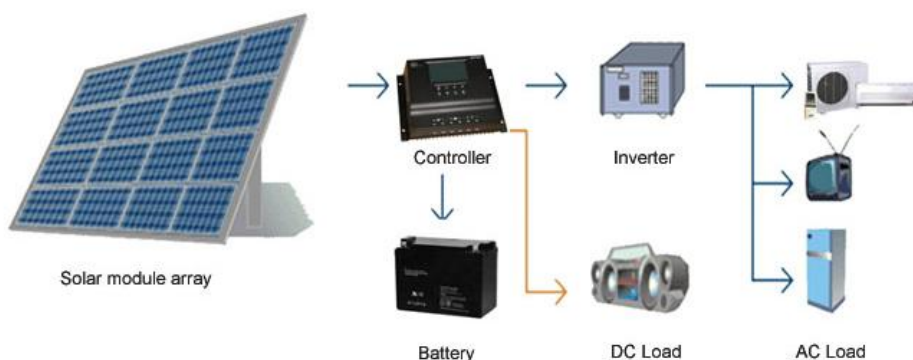


LCD DISPLAY

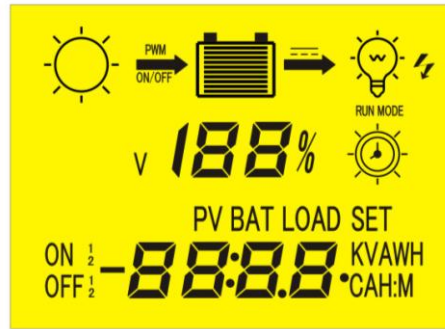


OPTIMIZED BATTERY CHARGING:

The EPIP controller has 4 stages of charging to provide increased battery capacity and life.

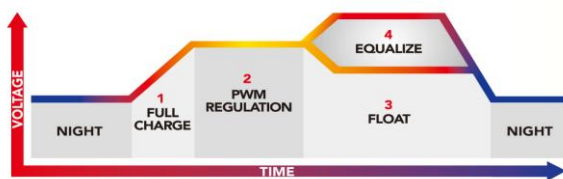

MECHANICAL SPECIFICATIONS:

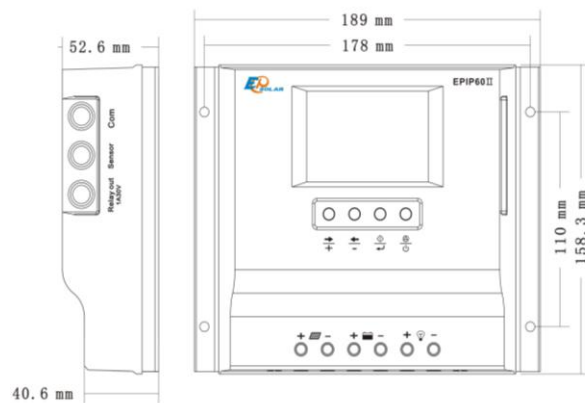

TECHNICAL INFORMATION:

	40 Amp	50Amp	60Amp
Rated solar input	40A	50A	60A
Rated load	40A	50A	60A
System voltage	12/24/48V	12/24/48V	12/24/48V
Regulation Voltage	14.4V	14.4V,	14.4V
Float	13.4V	13.4V	13.4V
Equalization	14.8V	14.8V	14.8V
Load Disconnect	11.4V	11.4V	11.4V
Load Reconnect	12.6V	12.6V	12.6V
Temp.Comp.(mV/°C)	-30mV	-30mV	-30mV
Self-consumption	≤30mA	≤30mA	≤30mA
Operation temperature:	-25 to +55		

Compliance: CE world Bank

Note: values are for 12V. Use 2X for 24V, use 3X for 48V.

WARRANTY: Three years warranty period. Contact EPSOLAR or your authorized distributor for complete terms



BEIJINGEPSOLAR TECHNOLOGY CO.,LTD.

Address: RM.501, BLDG 2, International Technology Park, No. 1 Shangdi

Xinxi Road, Haidian district, BEIJING, CHINA. 100085

TEL: 86-10-82894896/4856 FAX: 86-10-82894882

Email: polly_sun2003@163.com Website: www.epsolarpv.com

Msn: polly_sun2003@hotmail.com